

A-61J

Description:

Triad's **A-61J** Interstage audio transformer provides the durability and precision required in today's demanding designs. **Mu-Metal case** construction for magnetic field immunity and 60 to 80 dB Hum reduction. Low level **High Fidelity** with excellent Unwanted **Noise reduction**. Uses include Inter-stage coupling as well as impedance matching of amplifiers in order to achieve maximum power

Electrical Specifications (@25C)



Impedance		DCR (Ω)		Turns Ratio	Power level (mW)
Pri	Sec	Pri	Sec		
150	150	18	19.5	1.4:1:1	50
600	600	35	39		

PARAMETER	CONDITIONS	TYPICAL
Frequency Range	---	20 Hz – 20KHZ
Gain	1kHz, Rs = 600 Ω RL = 600Ω	-6.68 dB
Distortion (THD+N%)	1kHz, +19dBu input, Rs = 600Ω RL = 600Ω	0.028%
	1kHz, +14dBu input, Rs = 600Ω RL = 600Ω	0.02%
	1kHz, +9dBu input, Rs = 600Ω RL = 600Ω	0.023%
Max input level (60Hz)	1% THD + N%, Rs=600Ω, RL = 600Ω	+20dBu
Frequency response (1 kHz Ref.)	20 Hz, RS=600Ω, RL=600Ω	-1.44dB
	20kHz, RS=600Ω, RL=600Ω	+0.33dB
Phase Shift @ 20Hz	Reference to source generator Rs= 600Ω, RL = 600Ω	+3°
Phase shift @ 20kHz		-07°
CMRR	60 Hz	88 dB
	1 kHz	80 dB
Inductance Red and Blu	8.6V @ 60Hz	9H Min.
Dielectric Test	500V @ 60Hz	---
Temperature Rating	Operation & Storage	0°C to 70°C
Weight (grams)	---	134 Typ.








For illustration purpose only

ALL LEADS = 6.0" Min.

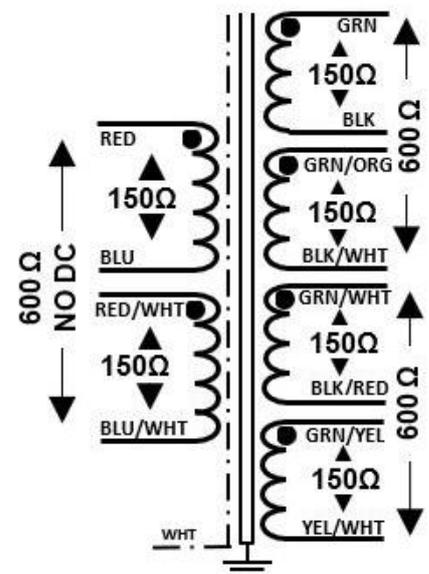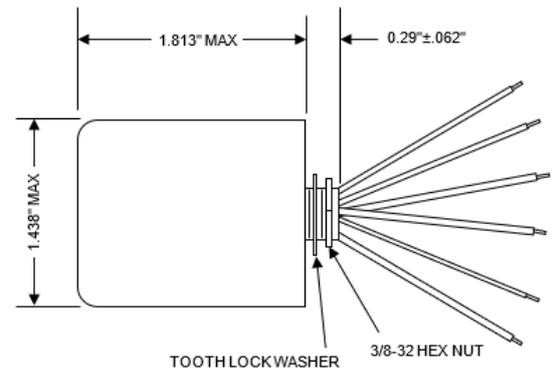

*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics for the most current version.

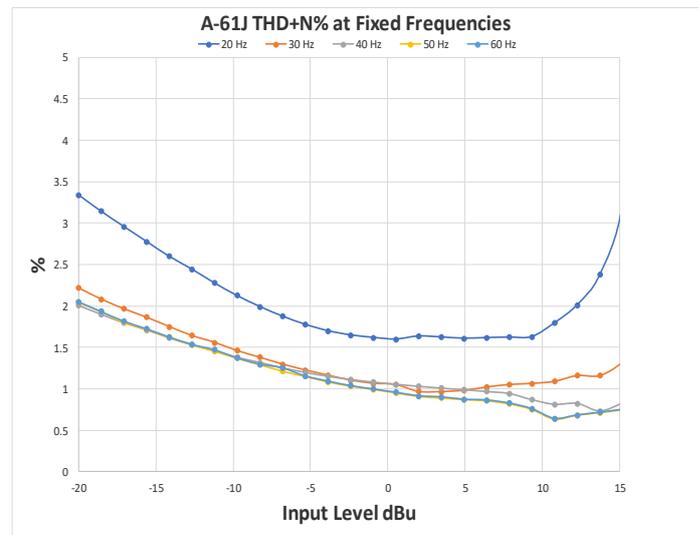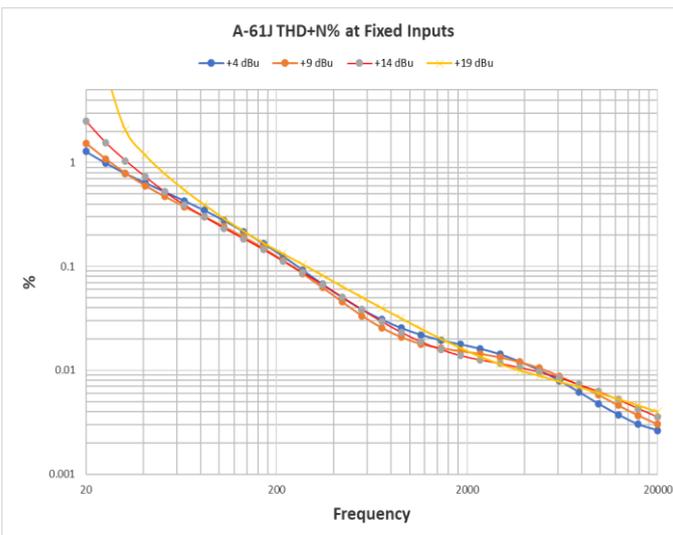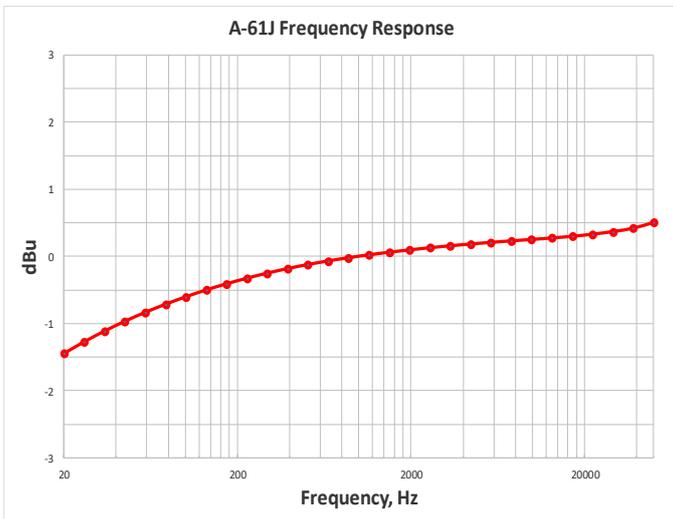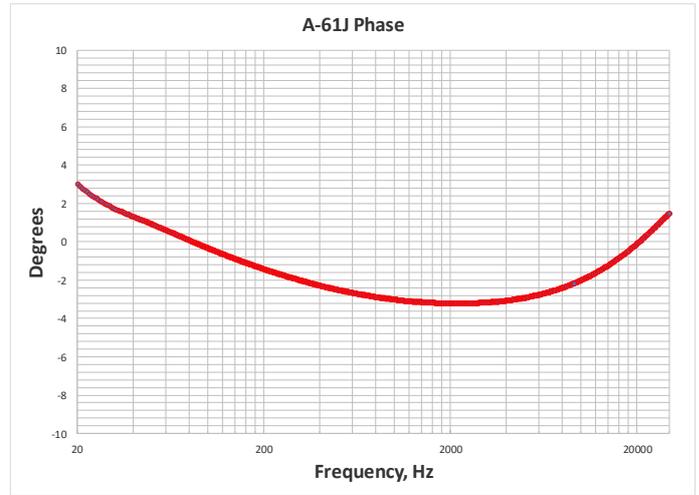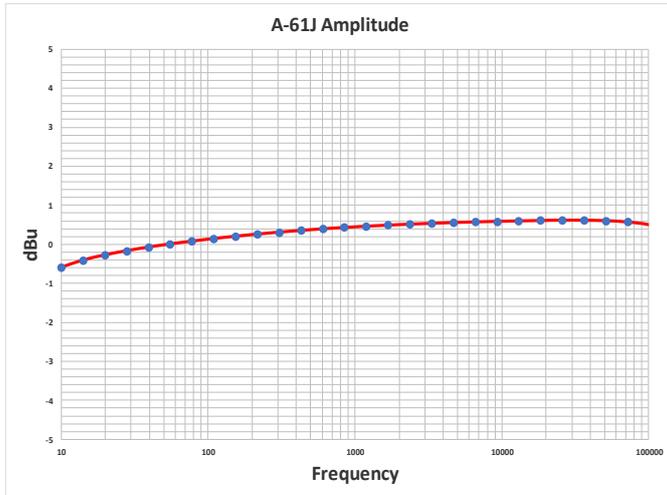

NOTE: Graph data was taken on a random sample using an Audio Precision Model APX555 Audio Analyzer.