

## RC - 2

### Description:


Triad high current rod core inductors provide cost effective energy storage. By conditioning the output signal, the inductor smoothes out the current waveform to provide a more stable current. These low cost inductors are designed to be compatible with automated P.C.B. installation.

### Outline Dimensions:

- A. Dimensions: As figure show      Unit: In inch  
 B. PIN DIM. : As figure show  
 C. WT Lbs. : 0.03   Oz

Type No.	+/- 10% Inductance	DC Rated Current	+/- 15% DC Resistance Ohms
RC-2	3.9 mH	0.320A	3.900

Inductance at a frequency range of 20KHz to 200KHz  
 Rated current 10 amps per pin maximum.  
 Rated current renders approximately 40C temperature rise.  
 Operating Temperature: -40°C to +85°C

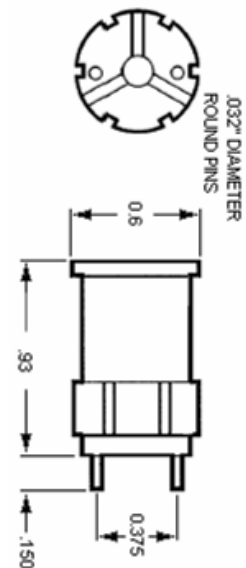

**RoHS Compliance:** As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

\*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics website for the most current version. For soldering and washing information please see <http://www.triadmagnetics.com/faq.html>